


## KEY SWITCH

Install key switch in the outside(as the figure) and parallel(or series) connect with the power supply and electromagnetic lock.




Model	KSN01	KSS01	KSW01	KSW02
Current draw	2A/250VAC	5A/125VAC	4A/1250VAC	5A/125VAC
Available	KA&KD			KA&KD&MK
Material	Stainless steel faceplate			
Dimensions	120x42x21.5mm T:1mm	86.8x86.8x23mm T:2mm	120x76x26.5mm T:1mm	120x76x48.5mm T:1.4mm

### Wiring diagram

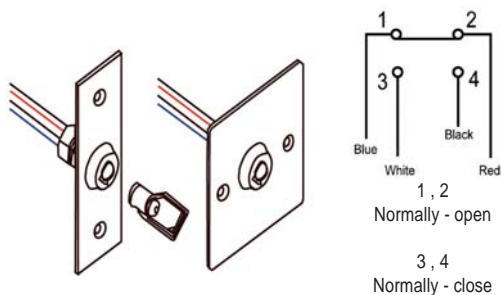


### Model Explain

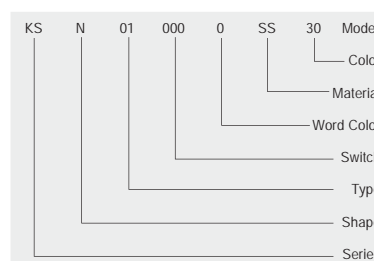

### Application

The connection for fail -secure lock devices

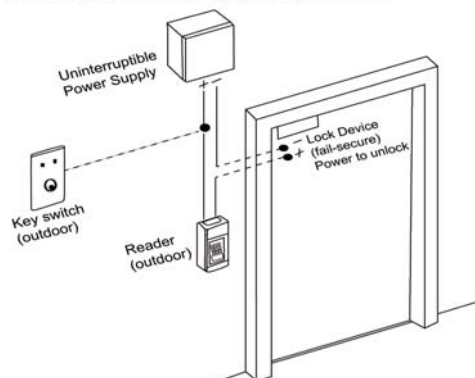

The connection for fail -safe lock devices

