

Model No.: 1309 Door Closer

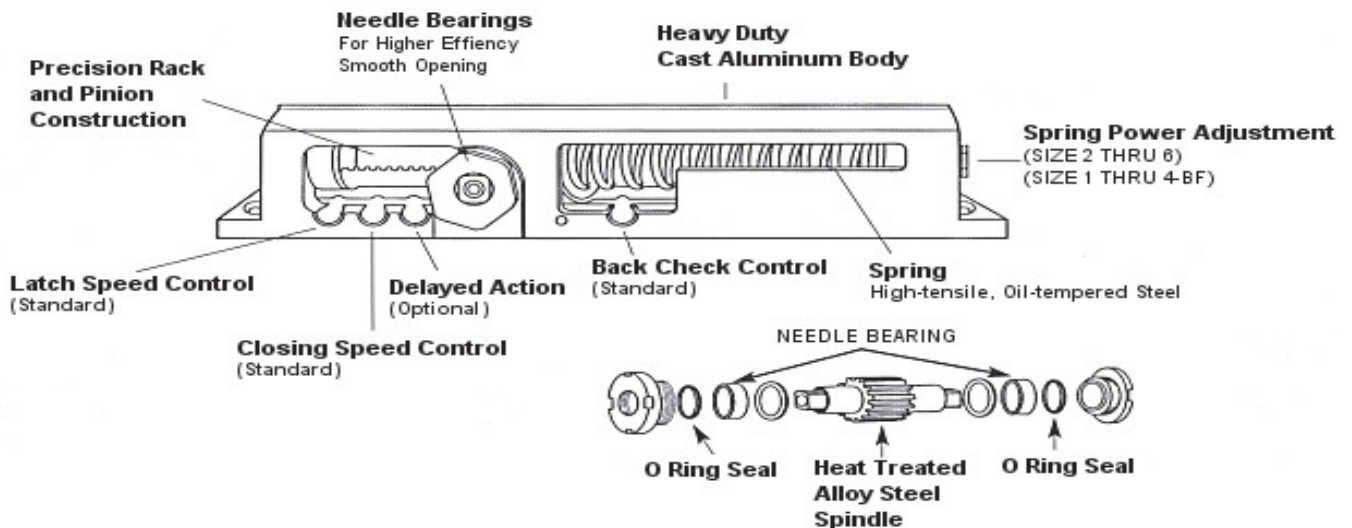

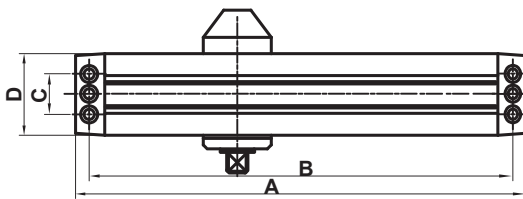
Full Cover Multi-size Full Feature Closer
ANSI 156.4 Grade 1



UL Listed Conforms to standards
UL10C

Specifications:**Description Size**

- A. Length of Closer Body 302mm(11-57/64")
- B. Horizontal Mounting Holes 283.5mm(11-1/32")
- C. Vertical Mounting Holes 28.6mm(1-1/8")
- D. Width of Closer Body 51mm(2-1/64")
- E. Projection from Door 61mm(2-13/32")

**Features:**

- Universal application. Non-handed for standard, top-jamb or parallel arm installation
- Non-sized, 2 thru 6 and 1 thru 4 FACTORY PRESET SIZE 3
- Standard adjustable back-check function
- Adjustable closing and latching speed by two separate regulating valves
- Standard full plastic cover
- Extended long arm for top jamb mount with deep reveals. 1309 EXT
- ANSI 156.4 Grade 1: UL listed for fire door assemblies
- Available in Alum, US3, US26, US26D, US10A and US5 Finishes
- Optional adjustable delayed action (DA) Preset at the factory for approximately 20 seconds, between 70° and 0° Delay time easily adjusted up to 1 minute.
- Barrier free (BR) Meets ADA regulation. Size 1 thru 4. Engineered with reduced spring power to provide easier opening for handicapped or elderly.